

25 Year System Warranty

Supports Gigabit Ethernet

Twin Cable


Features

- Category 6 compliant
- LSOH outer sheath
- Central 'X' filler
- Backward Compatible
- 23AWG conductor
- Twin (Shotgun) Cable
- 500m Reel
- 25 year system warranty
- Independently component tested
- No.4 cabling system by market share, as reported by BSRIA

Product Overview

Excel Category 6 Unscreened Twisted Pair (UTP) Twin LSOH cables are manufactured and tested to the TIA/EIA 568-B.2-1, EN50173-1 and ISO/IEC 11801 Category 6 specifications. Each cable consists of two sets of 8 colour coded 23AWG polyethylene insulated conductors. These are twisted together to form two sets of 4 pairs with varying lay lengths. These pairs are then formed around a central 'X' shaped polyethylene filler. This filler assists in maintaining and enhancing the cables performance.

The printing detail along the outer sheath includes the cable part code, specification detail and metre marking.

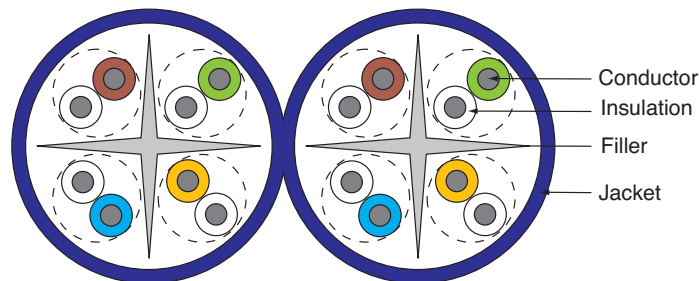

Specification

Overall Dimension	5.86 x 12.02 mm
Installation Temperature Range	0°C to +60°C
Nominal Velocity of Propagation (NVP)	69%
Installation Temperature	0°C to 50°C
Operation Temperature Range	-10°C to +75°C
Bend Radius	45 mm minimum
Standard of flame retardancy	IEC 60332-1-[1,2] (2004-07)
Cable jacket tested to	IEC 62321, US EPA 3540C, BS EN 14582

Performance Overview

Excel Category 6 cables are manufactured and tested to the Category 6 performance standards defined by the TIA, ISO and EN standards bodies. A range of performance characteristics are tested upto 250MHz including return loss, attenuation and near and far end crosstalk (NEXT and FEXT) for which both worst case and power sum tests are completed. Actual performance far exceeds the required standard – when tested in isolation and in circuit – resulting in significant headroom for even the most demanding of applications.

As well as providing link and channel compliance with the aforementioned specification – when installed with Excel category 6 components – the cable is also backward compatible with Category 5 and 5e components.

Performance / Specification Table

Freq (MHz)	Insertion Loss (dB)		NEXT (dB)		RL (dB)		ACR-F (dB)		PS NEXT (dB)		PS ACR-F (dB)	
	Standard	Excel*	Standard	Excel*	Standard	Excel*	Standard	Excel*	Standard	Excel*	Standard	Excel*
1	-	-	-	-	20	28	-	-	-	-	-	-
4	3.8	3.6	66.3	83.7	23	37.2	56	83.4	63.3	77.7	53	73.3
10	6	5.7	60.3	67.6	25	41.8	48	75	57.3	66.5	45	63.7
16	7.6	7.3	57.2	70.1	25	48.4	43.9	70.6	54.3	66.8	40.9	57.2
20	8.5	8.2	55.8	71.9	25	46.3	42	64.9	52.8	63.9	39	55.1
31.25	10.7	10.3	52.9	63.4	23.6	38.2	38.1	66.1	49.9	61.6	35.1	55.9
62.5	15.5	14.7	48.4	60.9	21.5	35.8	32.1	46.6	45.4	59.4	29.1	45.2
100	19.9	18.8	45.3	56.2	20.1	29.5	28	43.1	42.3	54.3	25	39.3
200	29.1	27.2	40.8	55.1	18	24.9	22	38.9	37.8	51	19	34.9
250	33	30.2	39.3	50.9	17.3	23.8	20	29.3	36.3	50.5	17	26.3

*Typical Result

Nominal velocity of propagation (NVP 69%)

System Warranty

When installed with Excel Category 6 cables and components by an accredited Excel Cabling Partner, this product is supported by a comprehensive 25 year product and applications warranty. This warranty assures not just standard compliance but also backward compatibility with Category 5 and 5e cables and components.

Typical Applications

- 100BASE-TX Fast Ethernet
- 1000BASE-T Gigabit Ethernet
- Composite Video
- Token Ring
- 155 Mbps ATM
- 622 Mbps ATM

Part Number Information

Part No.	Description
100-103	Excel Category 6 UTP Twin LSOH Cable - White



Virtware - Sol. Int. Telecomunicações, Lda
 Rua dos Canastreiros, 394
 4400-404 Canidelo VNG, Portugal

Tel: +351 918205881
 Email: info@virtware.pt Web: www.virtware.pt